


Bi-Facial PV

UP TO **25%**
MORE POWER

**FASTER
SNOW SHEDDING**

**RADIANT
AIR COOLING**

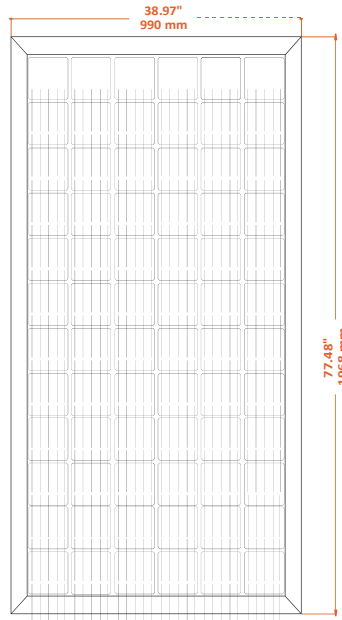


FRONT SIDE

BACK SIDE


PS-M72 (Bi-Facial) Dimensions

Mono-Crystalline Bi-Facial Modules with power up to 400 Wp are produced using the state-of-the-art (automated) robotic productionlines. These modules are suitable to be used for most electrical power applications and have excellent durability to prevailing weather conditions.

LINER PERFORMANCE WARRANTY

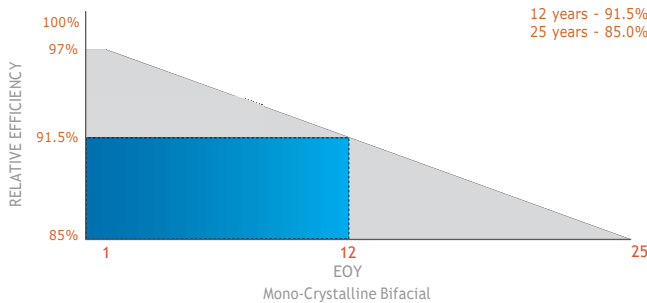

IV - CURVE M72 (Bi-Facial) - 370W

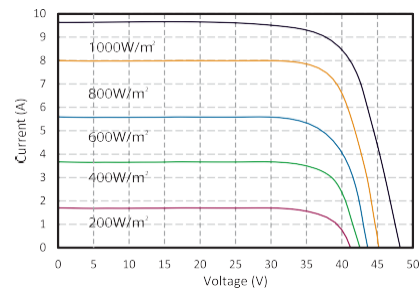

Certificates

- IEC / UL 61730 - The New Harmonized Standard for Safety
USA and International Access in One Standard
- CEC
- Bankability Report DNV GL



• Power measuring tolerance: $\pm 3\%$, other measurements tolerances: $\pm 5\%$

• Datasheet is subjected to changes without prior notice, always obtain the most recent version of the datasheet.

• Caution: For professional use only, the installation and handling of PV modules and cleaning modules require professional skills and should only be performed by qualified professionals, please read the Installation and Operation Manual before using the modules, also Cleaning Guidelines.

ELECTRICAL CHARACTERISTICS	360W	365W	370W	375W	380W
Characteristics (STC)	STC	STC	STC	STC	STC
Open Circuit Voltage - Voc (V)	48.04	48.12	48.36	48.63	48.90
Short Circuit Current - Isc (A)	9.55	9.62	9.70	9.78	9.87
Maximum Power Voltage - Vmpp (V)	39.95	40.25	40.60	40.85	41.05
Maximum Power Current - Impp (A)	9.02	9.07	9.12	9.18	9.26
Maximum Power - Pmax (W)	360	365	370	375	380
Module Efficiency - η' (%)	18.5	18.7	19.0	19.2	19.5

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C).






MATERIAL CHARACTERISTICS		PACKAGING	
Characteristics	Value	Physical Characteristics	Value
Cells per Module	72	Module Dimensions	77.48"x38.97"x1.57" / 1968x990x40 mm
Cell Type	Grade A - Mono-Crystalline Silicon (PERC) Bifacial 156.75x0.25± 156.75 mm	Module Weight	48.5 lb / 22 kg
Front Surface	Anti-Reflective Coated Tempered 3.2mm Glass	Pallet Dimensions W.D.H	79.13"x44.88"x44.48" / 2010x1140x1130 mm
Encapsulant	PID Free EVA	Modules per Pallet	27
Back Cover	Transparent Backsheet	Container Capacity	Value
Frame	Anodized Aluminum	20 Feet Container	270 Modules
Junction Box	IP68, 3 Bypass Diodes	40 Feet High-Cube Container	594 Modules
Cable and Connector	MC4 interconnection / Cable length can be customized		
Fire Classification	Spread of flame : A / Burning brand : C		

Electrical Characteristics with Different Rear Side Power Gain (Reference to 370 W front)					
Backside Power Gain	5%	10%	15%	20%	25%
Rated Maximum Power P max W	388.5	407.5	425.5	444.0	462.5
Open Circuit Voltage Voc	48.36	48.36	48.40	48.40	48.40
Short Circuit Current - ISC (A)	10.19	10.67	11.16	11.64	12.13
Maximum Power Voltage - Vmpp (V)	40.57	40.57	40.60	40.60	40.60
Maximum Power Current - Impp (A)	9.58	10.03	10.49	10.94	11.40
Module Efficiency - Em (%)	19.94	20.92	21.84	22.79	23.74

THERMAL CHARACTERISTICS		OPERATING CONDITIONS	
Characteristics	Value		
Voltage Temperature Coefficient (%/°C)	-0.30	Maximum Sytem Voltage - Vmax (V)	1000/1500
Current Temperature Coefficient (%/°C)	+0.05	Maximum Series Fuse (A)	20
Power Temperature Coefficient (%/°C)	-0.380	Operating Temperature Range (°C)	IEC: -40 to + 85 /UL: -40 to + 90
NOCT (°C)	42 ± 2	Bifaciality Ratio	75% ±5%

WARRANTY	
Product	12 Years
Power Output	12 Years; 91.5 % of Power Output 25 Years; 85 % of Power Output

FEATURE

-  Less degradation than standard modules
-  Positive power tolerance up to 5W extra output
-  Excellent low light performance
-  More power gain with same utilized area
-  PID resistant

BENEFITS

- Outstanding technical support
- Pre and after sales-service
- 12 years warranty on material and workmanship
- 25 years linear performance warranty
- Customized mounting solutions

APPLICATIONS

