




**Wi-Fi UPS**  
KEEPING YOU CONNECTED

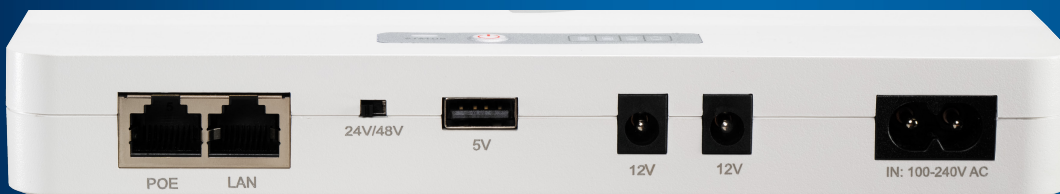

### Key Benefits

- Multi-Output Design: Extends network power for ONT and Gateway with a single unit.
- Backup Time: ONT + Gateway: 3–5 hours
- Gateway Only: 6-10 hours with sleek, modern in-home design.
- Enhanced Customer Experience
- 911 Emergency Calling: Provides uninterrupted access to emergency services through Wi-Fi calls.
- Security and Peace of Mind: Ensures Wi-Fi remains operational during power outages.
- Versatile Applications: Powers PoE devices, including ONTs and video surveillance equipment.
- Portable Power Bank: Acts as a large-capacity backup for additional needs.

### Business Advantages for ISPs

- Boost Customer Satisfaction: Keep customers connected during power outages and brownouts and reduce churn rates.
- Drive Revenue Growth: Offer the Wi-Fi UPS Lite as part of a top-tier package or charge a nominal monthly fee.
- Stand Out in a Crowded Market: Use as a powerful marketing tool to attract new customers and build loyalty.

### Why Choose the Wi-Fi UPS Lite?

- Innovative Power Solutions: Designed for flexibility and reliability.
- Customer-Centric Features: Tailored to meet the evolving needs of modern households.
- Market Differentiator: Elevates your service offerings and strengthens your brand.

#### Input

<b>AC Input Voltage</b>	100-240V
<b>AC Input Frequency</b>	50/60 Hz
<b>Plug Type</b>	2 prong ungrounded

#### Output

**Output Power:** 30W POE Output Voltage and Current: 24V/1A, 48V/0.5A  
 DC Output Voltage and Current: 12V/2A, 12V/2A  
 USB Output Voltage and Current: 5V/2.5A  
 DC Output Size: Female DC 5.5\*2.5mm

#### Battery

<b>Type:</b> Li-ion	76.96Wh/20800 mAh
<b>Design Lifespan</b>	8 years
<b>Runtime</b>	Up to 8 hours

#### Physical

Product size: 7.7" x 4.5" x 1"  
 Net weight: 1.9 lbs

#### Environment


**Operating Temperature Electronics** 0°C to +50°C ( 32°F to + 122°F)

**Operating Humidity** 0% to 95%

#### Safety compliance:



\*Includes 2 adapters, 1 AC Power Cable, 2 DC Cables

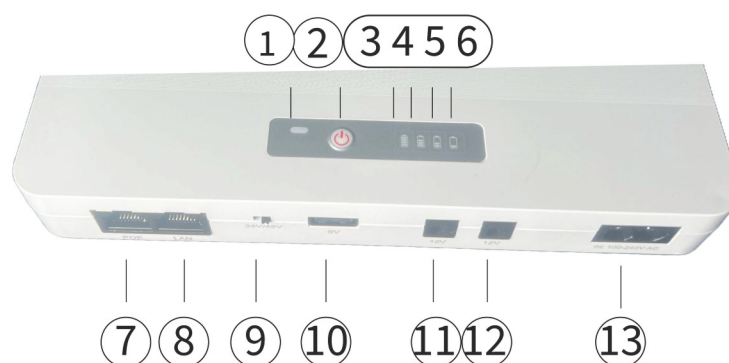

- Working status indicator
- ON/OFF switch
- 100% battery capacity indicator
- 75% battery capacity indicator
- 50% battery capacity indicator
- 25% battery capacity indicator
- POE output port
- Ethernet LAN in port
- POE port output volt selector
- USB 5V output port
- DC 12V output port
- DC 12V output port
- AC power input sockets